

Type	
Project	
Catalog No.	

3" 9W Round Adjustable LED Gimbal



SPECIFICATIONS

- Input Voltage: 120V AC
- Power: 9W
- Frame Color: White, Black
- Function: Dimmable
- Beam Angle: 110°
- IP Rating: Damp Locations
- Power Factor: >0.95
- Product Size: 3"
- Certification: ETL
- Life-span: 50000 hours
- 5 Years Warranty

DESCRIPTION

3" 9 Watt Round Adjustable LED Gimbal come complete with an external driver in a junction box. This allows for standard 120VAC ceiling wiring and pre-drywall installation of the driver. The LED gimbal and driver are cETL Listed certified for direct installation in Insulated Ceilings (IC) without any thermal housing.

FEATURES

- Air Tight & IC Rated – No Housing Required
- Fast & Easy Installation – Save Labor Cost
- Junction Box Included – No Additional Hardware Required, Direct Installation In Insulated Ceilings (IC) Without Any Thermal Housing
- CRI 90 – True Color Rendering Is For Option
- ETL-Listed – Reliable Quality And Safe Operation
- Suitable For Damp Locations
- Fashionable Design, 15° Adjustable To Each Side
- Durable Die Cast Aluminum Alloy For Optimal Heat Dissipation
- Oil Based Spray Painted, Scratch Resistant And Smooth Finish
- Epistar High Lumen LED Chip, Guaranteed 98% Lumen Maintenance After 6000Hrs, Strict Binning To Ensure Consistent Light Color
- Isolated LED Driver With 5 Years Warranty


SPECIFICATION

Model	Wattage	Color Temp	LED Type	Lumen	Voltage	Beam Angle	Working Temp	Halogen Equivalent	CRI	Color
GAD03-9W	9W	2700K*	COB	775	120V AC	110°	-25°- +50°	75W	82RA	White
		3000K		800						Black
		4000K*		825						
		5000K		850						

*Custom Make


Ordering Information:

Example: GAD03-9W-27K-WH




Model

GAD03




Wattage

9W = 9 Watts





Color Temp

27K = 2700K
30K = 3000K
40K = 4000K
50K = 5000K



Finish

WH = White
BK = Black

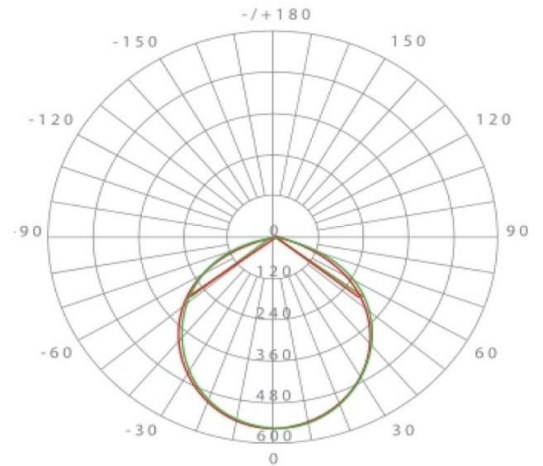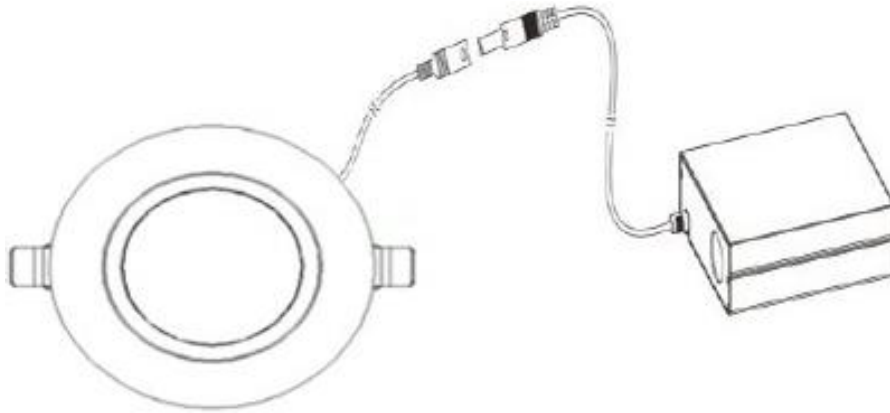

INSTALLATION

Connection

