


# Infinity Green Lighting

## 1LED 15W ROUND TRACK LIGHT

Type

Project

Catalog No.

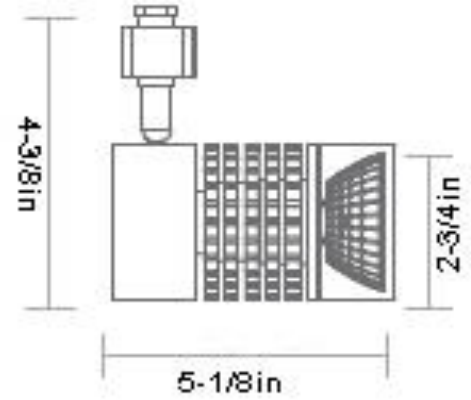

**Model # : IG-TR-004-15W**

Rated Wattage	15W			
Input Voltage	120V			
Color Temp	2700K*	3000K	4000K*	5000K
Lumens	980	1150	1226	1226
Beam Angle	*15°	*20°	38°	*60°
CRI	82			
Dimmable	Yes			
*Made To Order				

### ADAPTORS FOR CHOICE



H-Type Adaptor



J-Type Adaptor



L-Type Adaptor

### Specifications

- Ideal for accent lighting of shops, museums, galleries, schools, hotels, and homes
- Equivalent to 20 watts of metal halide track light
- Operating temperature range is -20°C to 40°C ambient
- Warranty: 3 Years
- Certifications: UL Approved

### Features

- **CAMETA™** Design: anti-glare, 80lm/W
- CREE COB LED, no shadow, strong penetrability
- Dimmable Diver: Dimming range from 100% to 10% with Electronic low voltage (EVLV) dimmer 120V only
- Design: unique, invisible wires, fashion, color finish(White, Black)
- Adjustable: continuous 350° rotation and 330° pivot
- Compared to metal halide: instant start, no noise and environment-friendly

### Compatible Accessories



IG-366W



IG-319S


# 1LED 15W ROUND TRACK LIGHT

## Ordering Information:


Example :IG-TR-004-15W-15-A-BK-H




Model



Wattage




Beam Angle



Color Temp



Finish



Track System

IG-TR-004

15W =15 Watts

15 = \*15 °  
20 = \*20 °  
38 = 38 °  
60 = \*60 °

A = 2700K\*  
B = 3000K  
C = 4000K\*  
D = 5000K


BK = Black  
WH= White

H = H-Track  
L = L-Track  
J = J-Track

### Optical Parameters 3000K

### Optical Parameters 4000K

### Optical Parameters 5000K

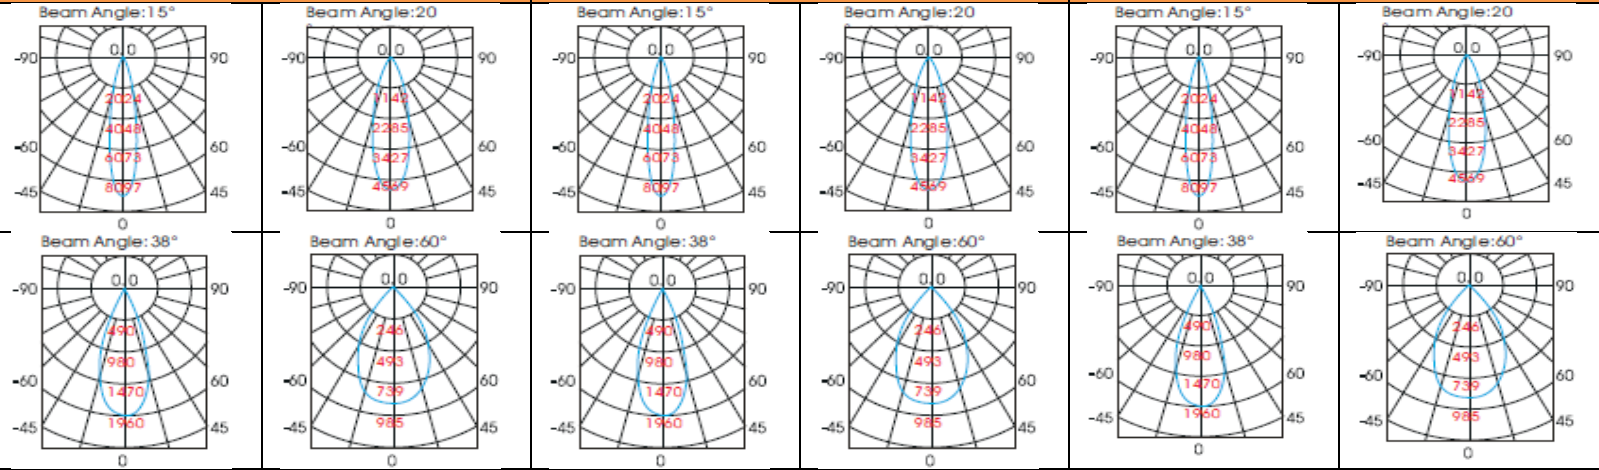

**BEAM ANGLE 15 DEG 3000K**

Distance(m)	Avg./Max. E(lux)	Diameter(m)
1	6057.2/8096.7	0.25
2	1514.3/2024.2	0.50
3	673.0/899.6	0.75
4	378.6/506.0	1.00
5	242.3/323.9	1.25

**BEAM ANGLE 15 DEG 4000K**

Distance(m)	Avg./Max. E(lux)	Diameter(m)
1	6552.6/8758.9	0.25
2	1638.1/2189.7	0.50
3	728.1/973.2	0.75
4	409.5/547.4	1.00
5	262.1/350.4	1.25

**BEAM ANGLE 15 DEG 5000K**

Distance(m)	Avg./Max. E(lux)	Diameter(m)
1	6552.6/8758.9	0.25
2	1638.1/2189.7	0.50
3	728.1/973.2	0.75
4	409.5/547.4	1.00
5	262.1/350.4	1.25

**BEAM ANGLE 20 DEG 3000K**

Distance(m)	Avg./Max. E(lux)	Diameter(m)
1	3042.9/4223.9	0.33
2	760.7/1056.0	0.66
3	338.1/469.3	0.99
4	190.2/264.0	1.52
5	121.7/169	1.66

**BEAM ANGLE 20 DEG 4000K**

Distance(m)	Avg./Max. E(lux)	Diameter(m)
1	3291.7/4569.3	0.33
2	822.9/1142.3	0.66
3	365.7/507.7	0.99
4	205.7/285.6	1.52
5	131.7/182.8	1.66

**BEAM ANGLE 20 DEG 5000K**

Distance(m)	Avg./Max. E(lux)	Diameter(m)
1	3291.7/4569.3	0.33
2	822.9/1142.3	0.66
3	365.7/507.7	0.99
4	205.7/285.6	1.52
5	131.7/182.8	1.66

**BEAM ANGLE 38 DEG 3000K**

Distance(m)	Avg./Max. E(lux)	Diameter(m)
1	1399.7/1960.1	0.60
2	349.9/490.0	1.21
3	155.5/217.8	1.81
4	87.5/110.8	2.42
5	56.0/78.4	3.02

**BEAM ANGLE 38 DEG 4000K**

Distance(m)	Avg./Max. E(lux)	Diameter(m)
1	1514.1/2120.4	0.60
2	378.5/530.12	1.21
3	168.2/235.6	1.81
4	94.6/132.5	2.42
5	60.6/84.8	3.02

**BEAM ANGLE 38 DEG 5000K**

Distance(m)	Avg./Max. E(lux)	Diameter(m)
1	1514.1/2120.4	0.60
2	378.5/530.12	1.21
3	168.2/235.6	1.81
4	94.6/132.5	2.42
5	60.6/84.8	3.02

**BEAM ANGLE 60 DEG 3000K**

Distance(m)	Avg./Max. E(lux)	Diameter(m)
1	1463.0/2294.3	1.02
2	365.7/573.6	2.05
3	162.6/254.9	3.07
4	91.4/143.4	4.09
5	58.5/91.8	5.12

**BEAM ANGLE 60 DEG 4000K**

Distance(m)	Avg./Max. E(lux)	Diameter(m)
1	1545.5/2423.7	1.02
2	386.4/605.9	2.05
3	171.7/269.3	3.07
4	96.6/151.5	4.09
5	61.8/185	5.12

**BEAM ANGLE 60 DEG 5000K**

Distance(m)	Avg./Max. E(lux)	Diameter(m)
1	1545.5/2423.7	1.02
2	386.4/605.9	2.05
3	171.7/269.3	3.07
4	96.6/151.5	4.09
5	61.8/185	5.12