
Main parts needed to mount the extrusion


End cap (B)




End cap with hole (C)


Specification	
Aluminum Profile:	ALP6001R
Diffuser:	PCdiffusedcover/PMMAopalcover/PMMAsemi-clearcover/PMMAclearcove
Length:	(79") 79 inches
Finish:	Silver Anodized
Installation:	Recessed

Installation Instruction


1. Stick the LED Strip

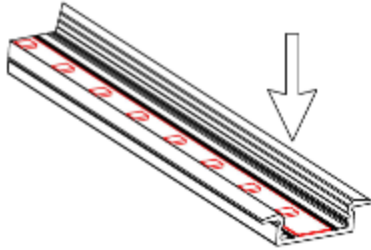


2. Press the Cover




3. Insert the End Cap

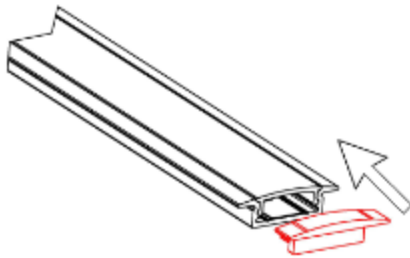

4. Stick the tape on the back of fixture

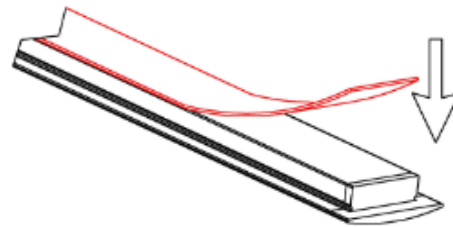

5. Install the fixture on the wall

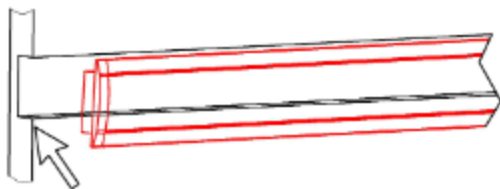

6. Installation Completed




Other Mounting Instruction


Option#1 - 1. Spread Glue in the Groove




2. Insert the End Cap (B) and (C), then attach the Profile to the Groove




3. Mount the LED strip (E), insert the cover (D), Lead out the power cable

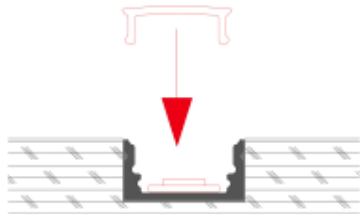


4. Run the cable to to the power source, then connect power

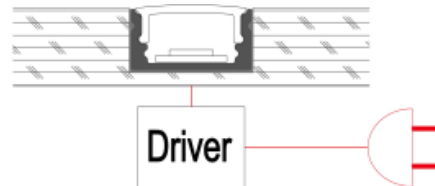


Option#2 - 1. Mount the LED Strip (E), insert the cover (D), insert end cap (B)

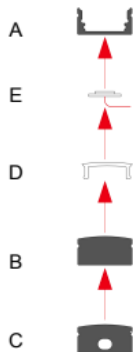


2. Mount the metal clip (F) on the board

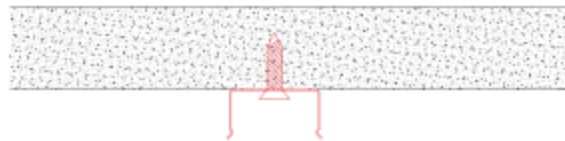


3. Mount the profile on the clip, lead out the power cable

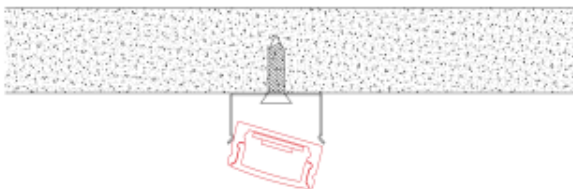


4. Run the cable to the power source, connect power

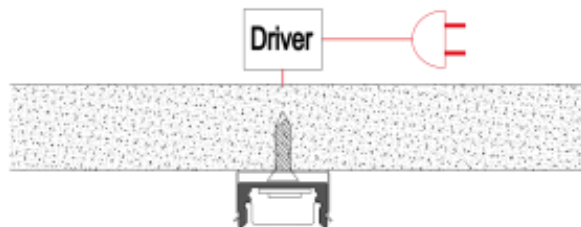


Option#3 - 1. Mount the adjustable clip (G) on the wall

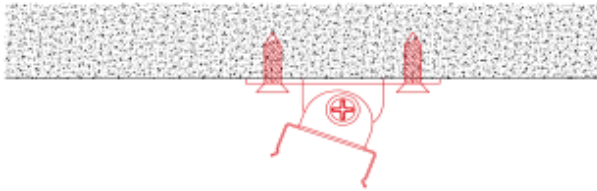


2. Mount the profile on the clip, lead out the power cable

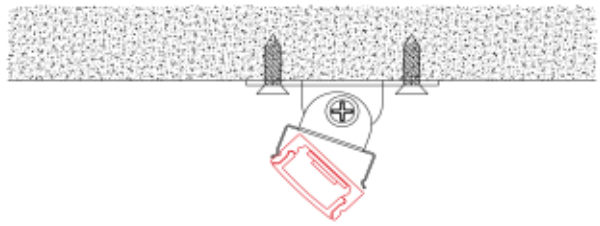

3. Adjust the profile angle

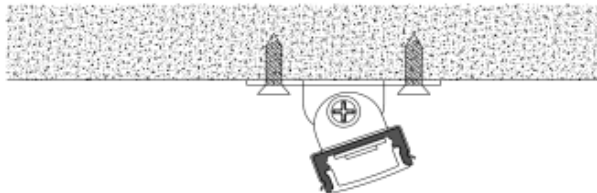

4. Run the cable to the power source, connect power

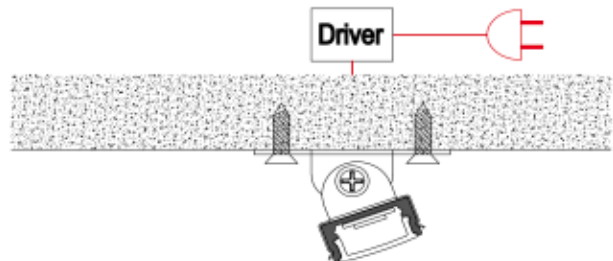

ALP6001R Accessories

EC-ALP6001R



End Cap With Hole

EC-ALP6001R



End Cap With Hole